


# Bollards

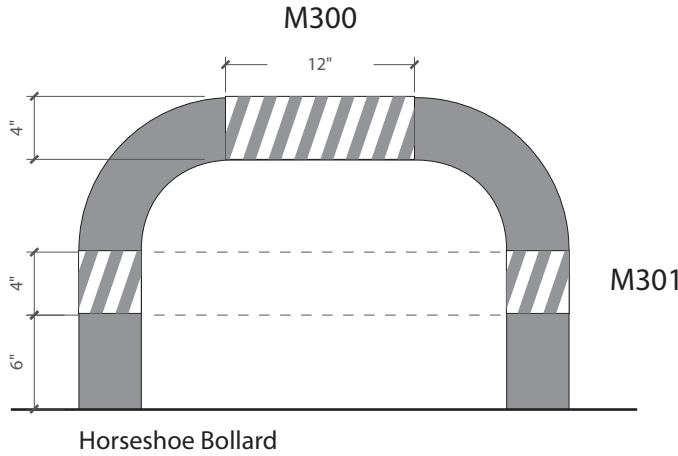

Bollards are painted CITGO Dark Gray. Apply bollard decals as shown on horseshoe, standard or concrete bollards. Bollard decals are striped white with reflective vinyl decal.



For non-standard type bollards, please consult your CITGO Region Brand Manager.

CITGO Dark Gray Paint

Bollard Decals

M300 16" h x 12" with Large Bollard Stripe

M301 4.5" h x 16" with Small Bollard Stripe

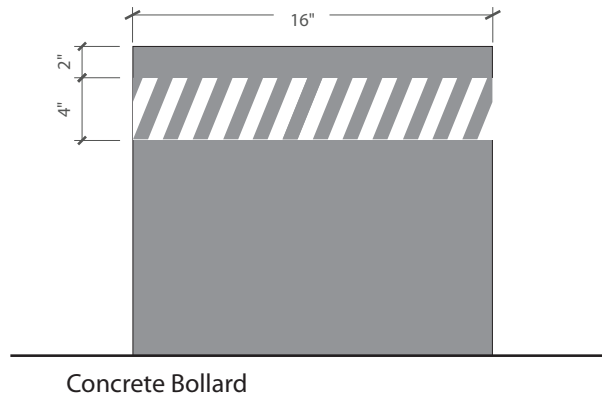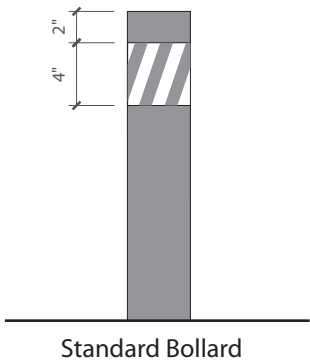

# Metal Frame Installation Instructions


Below are the instructions you will need to install the new metal frames on your bollards. If you have any questions or need to determine alternate locations, please contact your brand manager.


## Installation

Installation for the U-Shape bollards and bollards with two separate posts is the same. The 14” brackets (i) will need to be inserted into the left and right side of the 32” center bracket (ii) (B) respectively, regardless of size.

1. If the distance between the bollard posts is 33” or less, the 32” center bracket (ii) can be mounted directly onto the posts (A) with zip ties\* (iii).
2. If the distance between the bollard posts is 34” or greater, the 14” brackets (i) can be secured to the 32” center bracket with four screws (iv) per bracket—at the correct width—then mounted directly onto the posts with zip ties\* (iii).  
\* Be sure to level the sign between the bollards prior to securing the zip ties.
3. Maximum 2 bollard POP per site.

### Box Contents:


- i. 2 - 14” Brackets for Mounting to Bollard Posts L -1pc. & R-1pc.
- ii. 1 - 30” x 20” Metal Frame w/ 32” Center Bracket Riveted on
- iii. 4 - Heavy Duty Zip-Ties
- iv. 8- Sheet Metal Screws —polybagged together

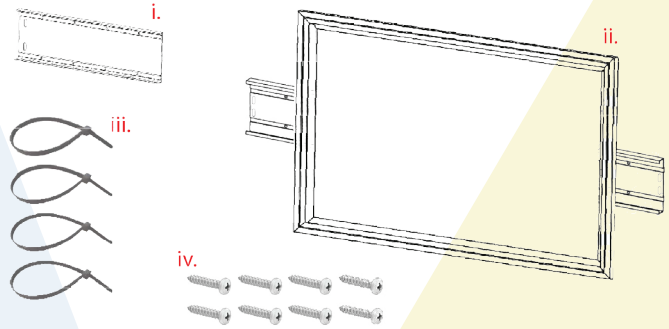


**Standard**



**Horseshoe**

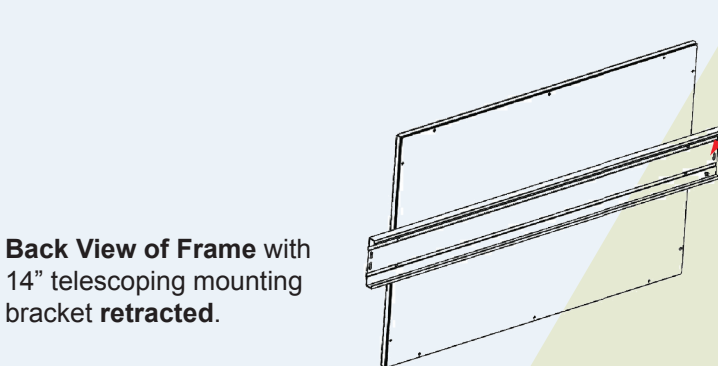

**Back View of Frame with 14” telescoping mounting bracket retracted.**

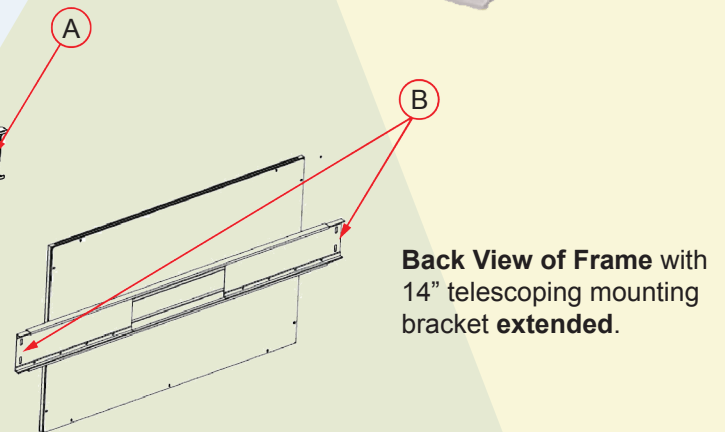

**Back View of Frame with 14” telescoping mounting bracket extended.**